


VIEW A-A

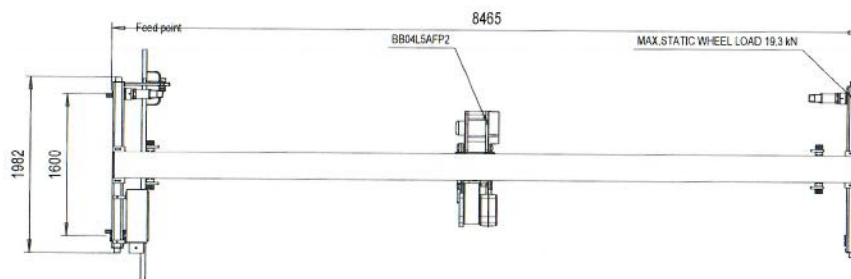

**TECHNICAL DATA**

LOAD	: 3200 kg
SPAN	: 8.3 m
LIFTING HEIGHT	: 4.64 m
HOISTING SPEED	: 5/0.83 m/min 2-speed
TRAVERSING SPEED	: 20/5 m/min 2-speed pole change
TRAVELLING SPEED	: 32/8 m/min 2-speed inverter
WEIGHT OF TROLLEY	: 210 kg
WEIGHT OF BRIDGE	: 1190 kg
MAIN CONTROL VOLTAGE	: 400 / 48 V; 50 Hz
CRANE GROUP	: H2B3
HOIST GROUP	: ISO M5
HOIST TRAVERSING GROUP	: ISO M5
CRANE DRIVE GROUP	: M5
SUPPLY POWER	: 4.28 kW
LENGTH OF RUNWAY	: 24 m

**SURFACE TREATMENT OF CRANE**  
 BRIDGE COLOR : Gelb  
 PAINT : A/70 µm

Runway tolerances must comply with standard ISO12488-1 tolerance class 2

CUSTOMER ORGANIZES SAFE PLATFORM FOR CRANE SERVICE

Indoor Use crane 5°...40° C  
 Radio controlled crane

ACCEPTED BY:

Pos.	Account	Description	Specification		
	HPO/SWS				DAS (2.72.1
	Design	Chd	Appt	Ref drawing	Vr.pry
	17.12.2015	BSC3.2t x 8.3m Hof:4.6m			1:40
	Date				1:40
	Wesp				1:40
	Draft				1:40
	<b>SWF</b> KRAANTECHNIK	aufkleber mit kom Ni-O			1:40

COMPANY:

DATE: